



Features

- Fanless industry Embedded platform
- Intel® Atom N270 1.6 GHz Processor, 533 MHz FSB
- Intel® 945GSE North & ICH7-M South Bridge Chipset
- On board DDR2 memory + SODIMM, Up to 1.5 GB w/o ECC
- 1 Mini PCI & 1 Mini PCI-E expansion slot
- Support removable CF for media play
- Support SATA SSD, 3 COMs
- Support 2 Watts speaker out

Cable-Free

Specifications

Fanless platform

- Low power low operation temperature
- Fanless Aluminum Alloy Embedded System

Dimension

- 235.6 (W) x 76.5 (H) x 230 (D) mm, Compact size

Processor

- Support Intel® Atom N270 1.6 GHz low power Processor
- 437 pins package, 533 MHz FSB, 512KB L2 Cache

Chipset

- Intel® 945GSE North & ICH 7-M South Bridge Chipset

Memory

- On board 512MB + 1 SODIMM Socket,
Up to 1.5 GB w/o ECC, 533 MHz DDR 2 Memory

BIOS

- Award System BIOS
- Support Console Redirection & Power On After Power failure

Disk Drive Storage

- 1 channel SATA interface + 1 internal CF module slot

Expansion

- 1 Mini PCI + 1 Mini-PCI-E expansion slot

Ethernet

- 1 Realtek 8111C 100/1000 Mbps LAN interface with Wake-On-LAN & DMI

Watchdog timer

- Programmable WDT from 1 to 255 seconds/minutes

Display Function

- Support high resolution 1080i VGA display
- Support DVI display

Hardware Monitor

- Monitors Voltage, Temperature

Support RTC & CMOS RAM

- Support Real Time Clock feature
- 256 bytes CMOS RAM built-in chipset

Audio

- ALC662-GR Codec supports Line-in, Line-out, 2W Speaker-out

RS-232 / 485 supports

- 2 DB-9 RS-232/485 , 1 DB-9 RS-232 , all optional DC-output

Support Hot Swappable CF

- Support Hot swappable external CF slot

Super I/O

- ITE 8712 & Fintek 81216 Super I/O for KB, MS, COM, Thermal monitor, Voltage monitor

Front panel Extend I/O

- 1 USB, 4 LED, Power switch & Reset , 1 Swappable CF slot

Rear panel Extend I/O

- Screw-Lock DC-9 ~ 30V power input, 3-pin connector
- 2 DB-9 for RS-232 / 485, 1 DB-9 for RS-232
- USB x 4, 1 RJ-45 100/1000 Mbit LAN connector
- 1 Line-in , 1 Line-out , 1 Speaker out w/ 2W amplify connector
- Power LED + HDD LED, 1 Power button
- 1 DVI display connector

Internal I/O interface

- 1 Mini PCI + 1 Mini-PCI-E expansion slot
- 1 CF slot, 1 SATA storage interface
- Total up to 4 D-In, 4 D-Out internal connector
- 1 x 5.1 channel Audio, CD-in, pin header
- 1 x 18-bit dual channel LVDS connector

Power Supply

- DC: 9V~30V / 1.5~5 A input

Power ON/OFF mode

- AT or ATX Power ON/OFF mode

Environment

- Operation temperature: -20°C ~ 50°C
- Storage temperature: -40°C ~ 80°C
- Relative humidity: 10% ~ 90% (Non-condensing)

Certification

- CE Class A
- FCC Class A

Ordering Guide

Specification may change without notice

Ordering NO.	CPU	Memory	DB-9 RS-232/485	Speak-out	DVI	GPS / HSDPA	PCI-32 slot
Pipal 2060-835	N270 1.6Ghz	512MB	232/485x2, 232x1	2 W	1	N/A	N/A


Optional order :

- 60W / 120W Power Adapter , HDD , SODIMM Memory
- Wireless LAN Module , Anti-Vibration HDD drive bay

www.arinfotek.com



Pipal 2060 rear I/O

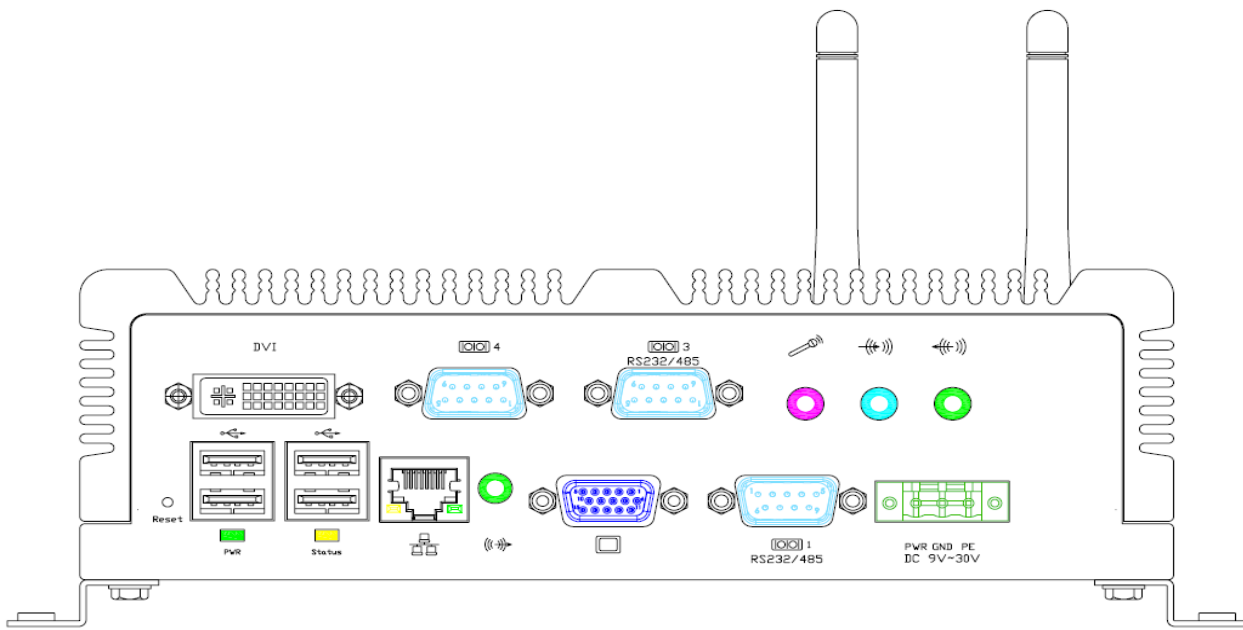

Dimension: without mounting kit 208 W x 66.5 H x 230 D mm
with mounting kit 235.6 W x 76.5 H x 230 D mm

Pipal 2060 front I/O

